

Linear Bar Grille (Supply)

Type: LBG-SS 313, 319 & 321



Model LBG-SS 319 Pictured

APPLICATION:

The LBG-SS 313, 319 or 321 is a Stainless Steel supply air linear bar grille with a small 3mm thick profile blade. It is available in any angle of deflection from 0 to 45 degrees, the most common are 15 or 30.

It has been specifically designed for use in walls or ceilings where conventional aluminium or mild steel products are not desirable either for hygiene, corrosion resistancy or perhaps just simply for quality & aesthetic reasons.

This product by nature of the manufacturing process remains robust and resistant to many chemicals & cleaning fluids etc. Applications such as Laboratories, hospitals, pharmaceutical and industrial premises as well as a wide range of marine facilities.

SPECIALS:

Due to the flexible manufacturing process it is possible to provide many different blade and frame arrangements in terms of thickness and pitch as well as depth for increased strength. Alternative shapes are also possible such as circular, arched, triangular and hexagonal for example.

STANDARD:

Our standard construction is of 304 grade Stainless Steel with a Brush finish known as Dull Polish.

MATERIALS:

Stainless Steel 304 or 316 DP1 marine grade with a minimum thickness of 1mm depending on grille dimensions. Rods are stainless steel with black Nylon / Glass spacers.

CONSTRUCTION:

Pressed formed frame & blades with rod and spacer assembled core providing added rigidity to the frame. Alternative materials and thicknesses are available.

ALTERNATIVE FINISH:

Polyester Powder Coated. (for mild steel or Aluminum option)
Mill finish Stainless Steel.
Polished Stainless Steel.
Polished Brass.

DIMENSIONS:

All dimensions are in mm.

Minimum size 100 x 100

Maximum size 3000 x 1000 (Single section)

Larger sizes can be manufactured however they may need to be in sections or have strengthened frames or mullions.

The "Pitch" dimension is 19 as standard however can be adjusted to any dimension to suit the clients requirements.

OPTIONS:

Removable & Hinged cores.


Various frame types & Concealed fixings are available.

Alternative frame & blade sizes


Filters & Filter frames to the rear.

Volume control & Fire dampers.

Fire rated & standard plenums / Wall Sleeves.

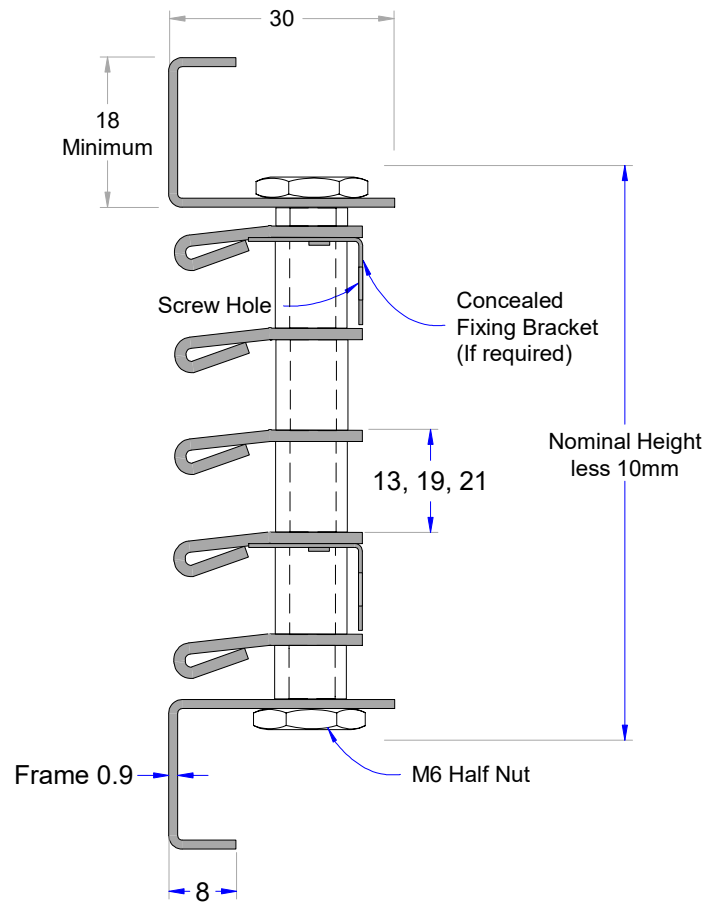

CORE CONFIGURATION

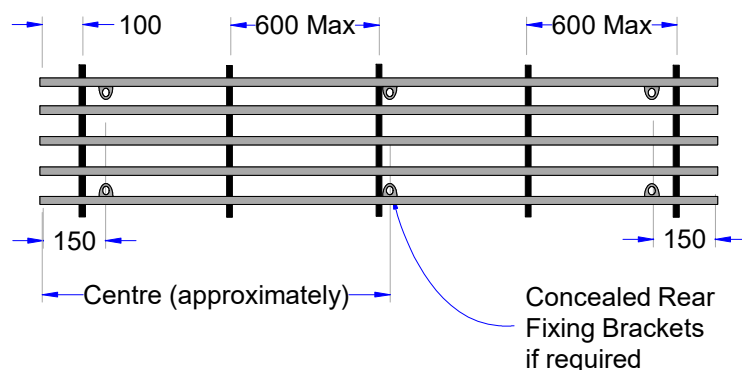

NOTES:

Mullion Centres Max 600mm

First and last mullion are 100mm in from each end.

SPECIFICATION:

The Flanged frame is to be manufactured from 1mm thick Dull Polished Stainless Steel sheet press formed from a single section of material to give a complete jointless corner on the face flanges.

The core is 50% free area and manufactured from matching material of the frame. The grain of the brush finish of the core is to be the same direction as the frame.

The core is to be securely fixed to the frame using rods and spacers. Screw Holes (countersunk or flat) shall be specified if required.

The Stainless Steel Grade shall also be specified i.e. 304 or 316 etc.